



无锡安博尔机械有限公司
Wuxi Anber Machine Co., Ltd.



丝网设备

WIRE MESH MACHINE

六角机 | 勾花机 | 铁丝包塑 | 刺绳机

Gabion Mesh Machine | Chain Link Fence Machine

Single Wire PVC Coating Machine | Barbed Wire Machine

无锡安博尔机械有限公司
Wuxi Anber Machine Co., Ltd.

地址: 昆山锦溪镇锦东路525号

Add: No. 525, Jindong road, Jinxi town, Kunshan, China

Tel: (+86)-510-88239310/88239309

Email: sales@anber-inc.com / kathy@anber-inc.com

Web: www.anbermachine.com



微信公众号
Scan with wechat!



官方网站
Our website

Company Profile

Business type: manufacturer and seller of kinds of wire mesh and fence making machine

Service: OEM service

Primary competitive: low in price and maintainance, high in quality and performance.

Products list:

Expanded metal mesh machine: heavy duty expanded metal mesh machine, expanded metal fence machine, diamond expanded mesh machine, angle bead machine, plaster stop machine, rib lath machine, hi-rib lath machine, brickwork reinforcing machine, brickwork reinforcement machine

Welded wire mesh machine: welded mesh fence/panel machine, welded mesh machine for construction, reinforcement mesh welding production line, space welded mesh machine for buildings

Wire drawing machine: iron wire drawing machine, stainless steel wire drawing machine, tin wire drawing machine, copper wire drawing machine, rod break down

PVC coated production line: for the fence, galvanized coating production line for the fence, wire PVC coated line

Other wire mesh machine: razor barded wire machine, barded wire machine, gabion mesh machine, gabion mesh fence machine and full automatic gabion mesh production line, hexagonal wire netting machine, chain link fence weaving machine, automatic chain link fence weaving machine, semi-automatic chain link fence weaving machine, hinge joint knot field fence machine and perforated metal mesh machine.

We also have rich experience in producing the wire mesh and fence products, such as expanded metal mesh, angle bead, plaster stop, welded mesh panel, welded mesh fence, chain link fence, gabion mesh, gabion mattress, double twist rockfall netting, welded mesh box, fasteners, Our factory is located in Wuxi, China. It is famous for its good wire mesh machine and wire mesh products. And was named "AAA" factory by our National Industrial Authority.

We hope to have chance to establish good business relationship with all the friends who are interested in our products. We will expect your visit to our factory.

公司简介

无锡安博尔机械有限公司，公司设备齐全，检测手段完善，技术部研发人员已达20多人。立厂至今，公司以科技兴厂为宗旨，关注国际丝网设备技术的发展趋势，博采众长，积极消化吸收国外先进技术，为丝网行业提供具有较高性价比的优质机械设备。

公司主要产品有：

焊网设备：全自动数控钢筋网焊机、高速公路及铁路护栏网数控排焊机、煤矿支护网焊接网、机舒乐板网排焊机、3D板焊机、桁架焊机、混凝土管桩钢筋焊接机、钢筋冷轧带肋设备及钢筋调直切断机、折网机、剪网机等。

拉丝机：按拉拔方式分为直进式拉丝机组、滑轮式拉丝机组、水箱式拉丝机组、倒立式拉丝机组；按用途分有制绳钢丝拉丝机，弹簧钢丝拉丝机，PC钢丝拉丝机，钢帘线拉丝机，胶管钢丝拉丝机，不锈钢拉丝机，铝焊丝拉丝机，镀锌铁丝拉丝机，铝包钢丝拉丝机，铜线铝线拉丝机等。我公司亦为客户提供整条生产线的设计，提供拉丝机生产所需的辅助设备，如井式退火炉、连续生产箱式退火炉、轧尖机、剥壳机、放线架、工字轮放（收）线机、象鼻子收线机。

钢板网机：各种型号重、中、小型钢板网冲剪机及其辅机开料架、压平机、整平机等，并配套提供模具。钢板网机生产出的产品主要用于做踏板网、电池、天线、护栏等。我公司也专业生产由钢板网机衍生的设备，如：护角网机、砖带网机、墙体抹灰网机、批汤网机、模板网机、极板网生产设备等，这类设备及产品现在国际市场上得到了广泛的应用，不仅能提高产品的利用率，节省人工，并且使用寿命长。

六角网机：又称格宾网机，石笼网机。同时我们配套制造整经机，收网机，绕簧机，剪网机，整平机，液压打包机等辅助设备。

其他配套丝网设备：刺绳机、勾花网机、冲孔网机

在产品的设计方面，公司技术人员已采用三维设计软件，提高了零部件生产的柔性化管理，机电控制技术采用日本三菱PLC控制器，保证了机电一体化控制的稳定性。公司开发的拉丝机、焊机、钢板网机、六角网机、勾花网机，已远销欧洲、非洲、美洲等地。为适应市场需求，设计制造了现在在市场上运用很广泛的砖带网机、极板网机、护角网机、模板网机，并赢得了广大用户的好评和信任。本公司将遵循“用户满意，就是我们的荣誉”为宗旨，一如既往地为用户提供精良的产品和优质的服务。



ENTERPRISE HONOR

企业荣誉 >>

CONTENTS 目录

Enterprise Honor	01	企业荣誉
Gabion Mesh Machine	02	大六角网机
Layout Of Gabion Mesh Machine	03	六角网机布局图
Accessory Machine	03	六角网生产线辅助设备
Chain Link Fence Machine	05	双螺旋全自动勾花网机
Layout of Chain Link Fence Production Line	06	勾花网生产线布局图
Single Wire PVC Coating Line	07	铁丝包塑生产线
CS-A Type Barbed Wire Machine	08	CS-A型刺钢丝机
CS-B Barbed Wire Machine	09	CS-B单股刺绳机
CS-C Reverse Twist Barbed Wire Machine	10	CS-C正反拧刺绳机
Razor Barbed Wire Making Machine	11	刀片刺绳机
Accessory Machine	12	刀片刺绳机辅助设备



营业执照 / Business certificate



CE证书 / CE certificate



丝网机械专利 / Patents of mesh welding machine



大六角网机 Gabion Mesh Machine


描述 / Description

大型六角网机是生产大规格六角网的专用编织设备。它分四个系列十二种型号。最大可编织网幅宽度超过四米，为国内首创。它适用于篱笆网和石笼网的生产。此网机具有结构简单、生产效率高，操作与维修简便等优点，赢得用户的广泛赞誉。Hexagonal wire netting (Gabion mesh) machines are specially designed to produce the large size and heavy-duty hexagonal wire meshes for the fence and gabions. It has 3 standard width 2.4m, 3.2m and 4.0m; for meshes 60X80mm, 80X100mm, 100X120mm and 120X150mm. The machine is easy in operation and maintenance and is a high production efficiency machine. The hexagonal netting machine comes with wire spool and payoff(option), wire tension device, netting station with work platform, air compress system and lubrication system and winding station.

主要技术参数 / Parameter

Model 型号	Mesh opening 网孔(mm)	Max Width 网宽 (mm)	Wire Diameter 丝径(mm)	Power 电机功率 (kw)	Theory speed 理论速度(m/h)
ABE-23-60	60x80	2300	1.6-3	11	165
ABE-23-80	80x100	2300	1.6-3		195
ABE-23-100	100x120	2300	1.6-3.2		225
ABE-23-120	120x150	2300	1.6-3.5		225
ABE-33-60	60x80	3300	1.6-2.8	15	165
ABE-33-80	80x100	3300	1.6-3		195
ABE-33-100	100x120	3300	1.6-3.2		225
ABE-33-120	120x150	3300	1.6-3.5		225
ABE-43-60	60x80	4300	1.6-3.8	22	165
ABE-43-80	80x100	4300	1.6-3		195
ABE-43-100	100x120	4300	1.6-3		225
ABE-43-120	120x150	4300	1.6-3.2		225

六角网机布局图 Layout Of Gabion Mesh Machine

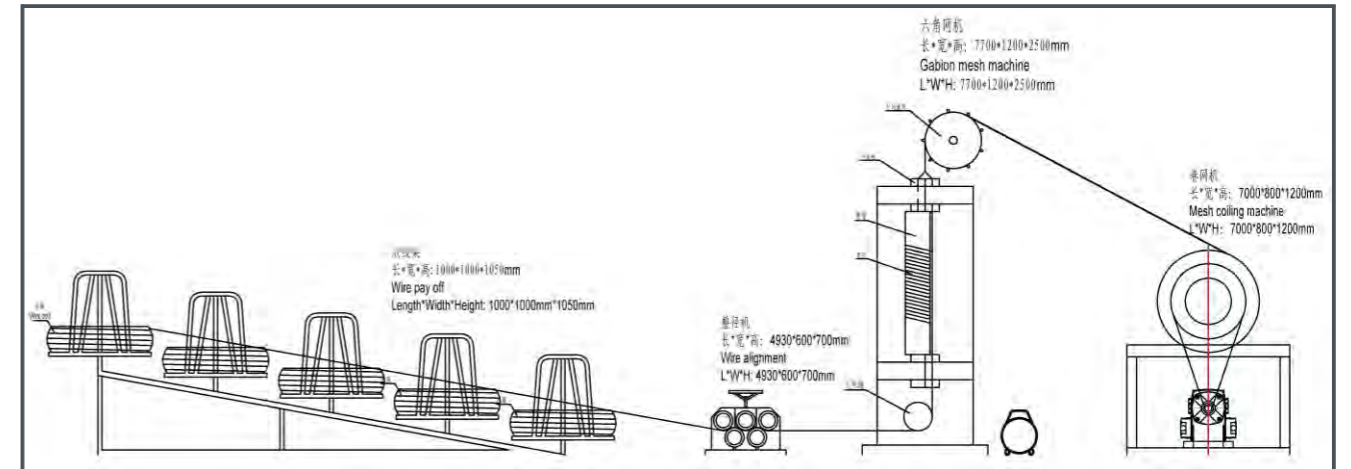

六角网生产线辅助设备 Accessory Machine



绕簧机/Spiral Coiling Machine

Parameter

Diameter of spring wire: Φ12~Φ.4.4mm
Diameter of spring bar: Φ25mm,
Quantity of spring bars: 6
Rotational speed of spring bar: 450 r/min
Interior diameter of spring: Φ30mm
Major diameter of spring: Φ40~Φ60
Quantity of spring layers: 2-4
Motor power: 2.2KW,
Overall size (length * width * height): 2200 X 900 X 1500(mm)

技术参数

绕簧丝径: Φ12~Φ.4.4mm
绕簧杆: Φ25mm,
绕簧杆个数: 6
绕簧杆转速: 450 r/min
簧线内径: Φ30mm
簧线外径: Φ40~Φ60
簧线层数: 2-4
电机功率: 2.2KW,
外形尺寸(长*宽*高): 2200 X 900 X 1500(mm)

六角网整平机/Mesh Straightening Machine

六角网整平机是安博尔机械有限公司专门设计用于整平六角网的机器。This machine is applicable to the surface straightening of various plastic coating meshes, and could be used alone. After straightening, the materials are smooth and flat, without pressing marks, without damaging the material surface, reaching sound effects.

压辊长度: 4300mm
压辊直径: 200mm
压料厚度范围: 3mm-10mm
压料宽度范围: 0mm-4300mm
材料类型: 包塑网片
主要部件: 橡胶辊: 包胶厚度单边10mm
橡胶辊数量: 9轴 (上4下5)
蜗轮蜗杆传动比1:6
蜗杆每转行程: 1.0mm

Roller length: 4300mm
Press roller dia.: 200mm
Press plate thickness range: 3mm-10mm
Press plate width range: 0mm-4300mm
Main components: rubber roller: the plastic glue depth is 10mm.
Material type: plastic coating mesh
Quantity of rubber rollers: 9 pieces (4 on the upper and 5 on the lower)
Transmission ration of worm gear and worm bar: 1:6
The stroke distance of the worm: 1.0mm





六角网剪网机/Mesh Shearing Machine

Model 型号	ABE-JW-4x2500	ABE-JW-3x4350	
Wire diameter 丝径	4 mm	3 mm	
Mesh shearing width 网片剪切宽度	2500 mm	4350 mm	
Shearing strength 剪切强度	450N/mm ²	450N/mm ²	
Shearing angle 剪切角度	1°30'	1°30'	
Stroke number per minute 速度	22	20	
Motor power 功率	55KW		
Oil pump 油泵	Model 型号	PLV-14	
	Flow 流量	14 ml/r	
	Pressure 压力	21MPa	
Overall size 外型尺寸	Length 长度	3240mm	5040mm
	Width 宽度	1300mm	1300mm
	Height 高度	1435mm	1435mm
Machine weight 机器重量	3200Kg	4680Kg	
Contents of oil tank 油罐容量	90L	92L	

六角网握边机/Border Reinforcement Machine

石笼网握边机是安博尔机械有限公司专门设计用于六角网握边的机器。六角网握边机是六角网生产中必备的设备之一，它可以根据客户的需要用于六角网生产线中，也可以单独用作六角网握边。六角网握边机是用于六角网网片直切之后，使六角网的边更坚固。


Border reinforcement machine is a new production which is designed and manufactured by ourselves. It is one of main devices in double twisted hexagonal netting producing line. It is located in the back of netting cut machine in producing line. It can use either in double twisted hexagonal netting producing line or in some places it is used single according user's demand.

线径: ≤ 3mm	Netting wire diameter: ≤ 3mm
网宽: 3000 mm	Working width: 3000 mm
生产速度: 10个/分	Output: 10times/min
电机功率: 3 KW	Motor power: 3 KW
电机转速: 1000r/min	Rotate speed motor control: 1000r/min
弯边角度: 顺时针: 306°~720°	Range controller adjust: clockwise rotate 306°~720°
	逆时针: Anti-clockwise rotate 180°~360°, height of front side: 860 mm
前段高度: 860 mm	Allover size (length x width x height): 3800x800x1240 (mm)
机器尺寸 (长×宽×高): 3800x800x1240 (mm)	



ABE-DB-10 液压打包机/Hydraulic Gabion Mesh Packing Machine

公称压力: 80KN	Nominal pressure: 80KN
工作行程: 700mm	Working stroke: 700mm
压板下行速度: ≥35mm/s	Pressure plate downwards running speed: ≥35mm/s
压板上行速度: ≥50mm/s	Pressure plate upwards running speed: ≥50mm/s
机器包装尺寸 (长×宽×高): 3700x2450x1250mm	Machine packing size (L*W*H): 3700x2450x1250mm
产品打包尺寸 (长×宽×高): 2000x1000x1000mm	Packing size of gabion mesh: 2000x1000x1000mm
液压系统工作压力: 5MPa	Hydraulic system working pressure: 5MPa
液压用油: 32# 液压油	Hydraulic oil: 32# hydraulic oil
120KG	120KG
装机功率: 7.5Kw	Machine power: 7.5Kw

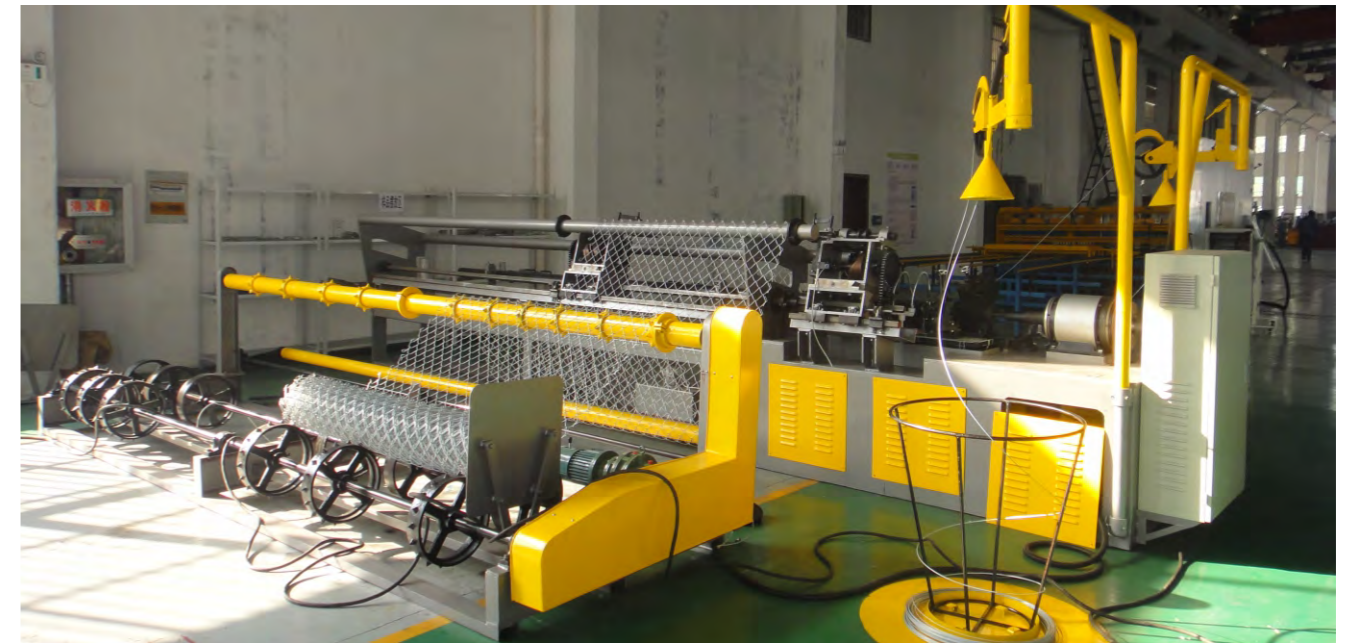

双螺旋全自动勾花网机 Chain Link Fence Machine

描述 / Description


勾花网机是由高质量的槽钢焊接而成，带PLC电控柜。勾花网机是一种对低碳钢丝、不锈钢丝、铝合金丝、PVC丝、喷塑丝钩编而成勾花网，具有网孔均匀、网面平整、美观大方、网幅宽窄可调，丝径粗细可调，不易腐蚀寿命长，编织简洁、美观实用等特点。The chain link fence machine is welded of high quality steel and channel steel with PLC control. Its knife molds has high hardness to ensure the stability and beauty of the network and it has high cutting precision with easy operation. The chain link machine using either galvanized wire or PVC coated wire materials. It can produce both standard and compacted rolls by the adjustment in the coiling speed.

勾花网机主要技术参数 / Parameter Of Chain Link Fence Machine

Model	型号	ABE-GH-2	ABE-GH-4
Width scope of weaving	编织宽度	4m	2m
Width of net	网宽	2m/3m/4m	2m
Diameter of wire	丝径	1.8-4mm(根据网孔尺寸)	
Speed of the axle of shaped knife	成型刀轴转速	275-1100 rpm (变频调速)	
Mesh opening size	网孔尺寸	1" -3-1/2"	
Weight	重量	4200 kg	2080kg
Overall dimension	外形尺寸	6.7mX1.43mX1.8m	4.7mX1.43mX1.8m
Power consumption	动力消耗	七个电机, 3.0KW三相电机一台; 1.5KW三相电机一台; 0.75KW三相电机二台; 0.55KW三相电机一台; 0.12KW三相电机二台。 Seven motor, one 3.0KW, one 1.5KW, two 0.75KW, one 0.55KW and two 0.12kw	
Output	产量	210-240m ² /h 孔径x丝径配比差异有影响以实际生产为准。 Actual output is related with the mesh opening size.	
Material	适用材料	适应材料广泛 镀锌丝、改拔丝、钢丝、涂塑丝等 Galvanized wire, drawn wire, steel wire, PVC wire	

成品勾花网 Chain Link Fence

材质：低碳钢丝、不锈钢丝、铝合金丝、PVC丝、喷塑丝
 勾花网用途：可用于制作饲养鸡、鸭、鹅、兔及动物园围栏。机械设备的防护，高速公路护栏，体育场周围网，马路绿化带防护网，煤矿支护假顶。该丝网在制作成箱子状的容器后，用乱石等填满网箱，可用于保护和支撑海堤、山坡、路桥、水库及其他土木工程。是防洪和抗洪上好材料。还可用于工艺品制造，机械设备的输送带，具有抗冲击能力强，耐腐蚀美观等特点。
 Material: Hot-dip galvanized iron wire, galvanized iron wire
 Application: Chain link fences are mainly used as isolation screen and protection system for expressway and railway, protective fences for rivers, playground and gardens, mines, fences for security for residential buildings and commercial sites.

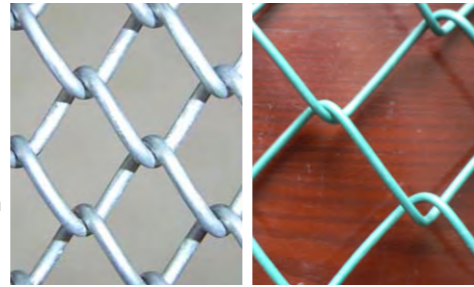

勾花网技术参数 Chain Link Fence Technical Parameter

网孔 Mesh opening	Inch	1.5	2	2.25	2.4	2.5	3	4
	mm	40	50	55	60	65	76	100
丝径 Wire diameter	18#—7# 1.20mm—5.0mm							
网长 Mesh length	1.0m—5.0m							
网宽 Mesh width	0.5m—5.0m							



铁丝包塑生产线

Single Wire PVC Coating Line

描述

塑料包线机组用于生产PVC聚氯乙烯塑料绝缘电线。更换机头及相应辅机设备，可生产各种不同规格的绝缘电线。本机挤出机、牵引机采用YCT系列调速电动机，调速范围大；机筒、机头的加热温度采用智能温度控制仪自动控制，灵敏度高。机组结构简单、操作方便、安全可靠。

Detailed Description

Wire PVC coating line is used to produce PVC insulated wire, the customer can produce insulated wire of different size by change the machine head and related accessories. The extruder and tractor apply YCT series governor motor with big range of speed adjustment; we use the intelligent temperature control instrument to control the temperature of the capstan and head automatically with high sensitivity. The structure of the production line is simple, easy to operate, safe and reliable.

技术参数 Technical Parameter

Screw dia.	螺杆直径	mm	65
Screw length	螺杆工作长度	mm	1625
Aspect ratio	螺杆长径比		25:1
Screw rotate speed	螺杆转速	r/min	4-40
Motor	电机		Y160M-4;11KW
Capstan heating and cooling	机筒加热与冷却	kw	5
Machine head heating power	机头加热功率	kw	0.7
Center height of the machine	机组中心高	mm	1000
Machine weight	重量	kg	450




冷却水槽
Cooling Channel


倒立式收卷机
Vertical Wire Take-up

放线架
Wire Pay-Off

勾花网生产线布局图

Layout of Chain Link Fence Production Line

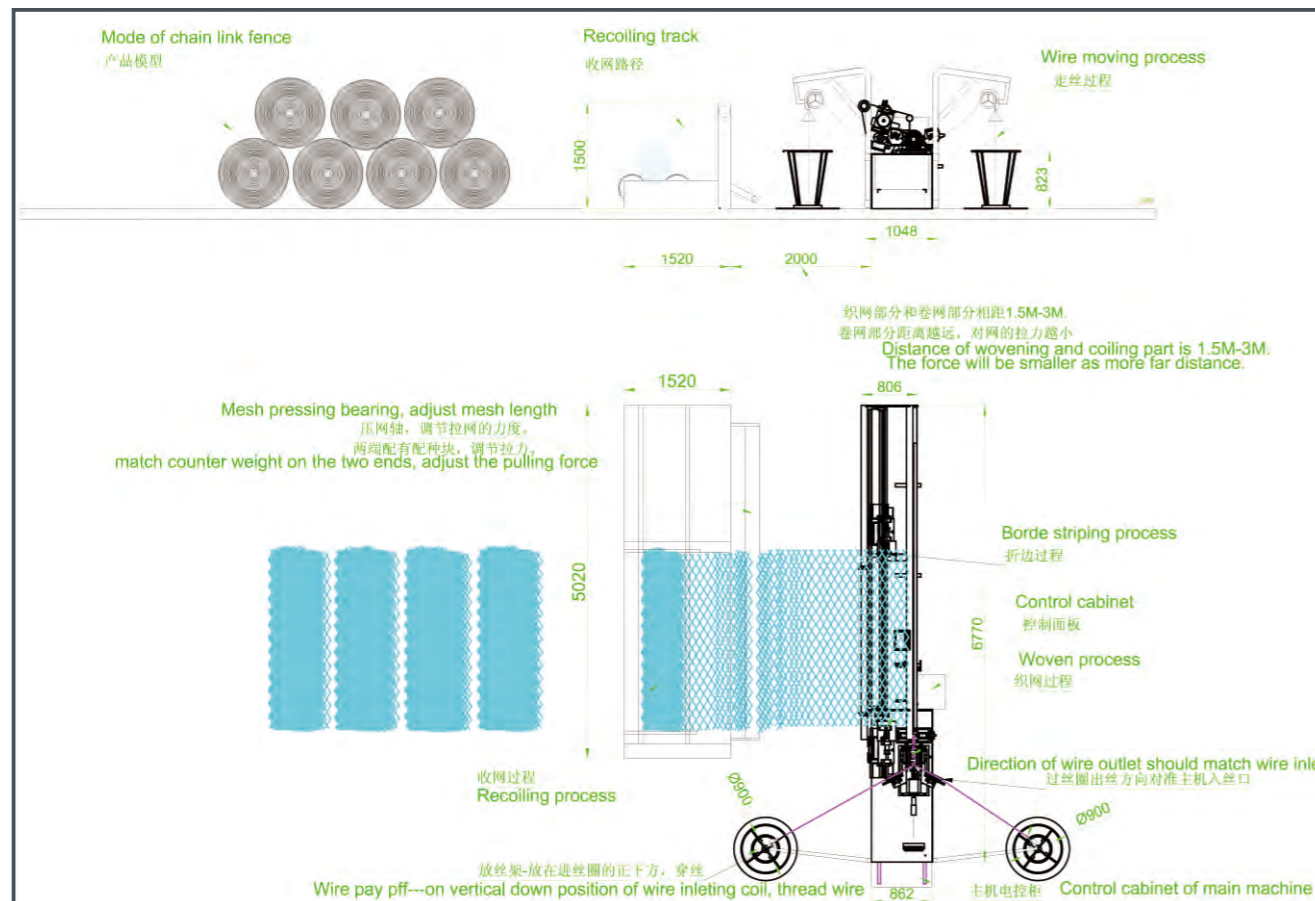

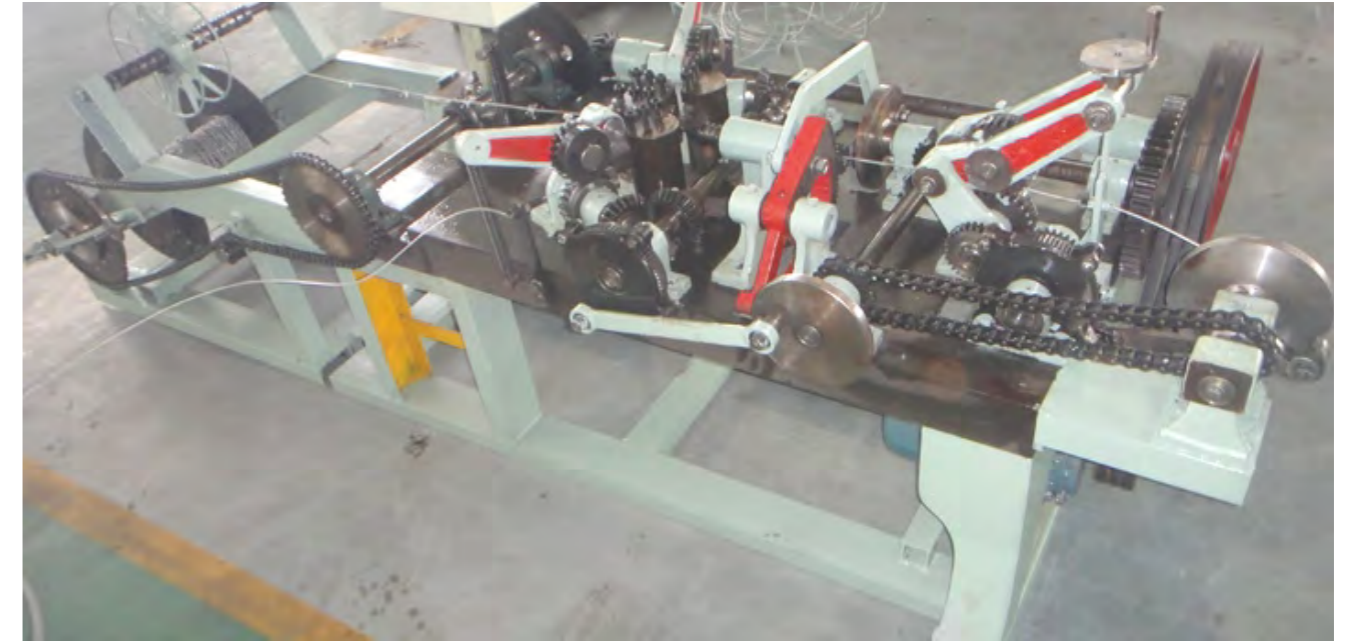

CS-A型刺钢丝机 CS-A Type Barbed Wire Machine

描述

该机主要适用于生产各种多股刺钢丝，其使用材料应符合GE/T343-94标准要求《一般用途热镀锌低碳钢丝》，该产品广泛用于国防、铁路、高速公路、农畜牧等行业。

CS-A型钢丝机由绕丝和收丝加捻二部分连接组成，并配套四只放丝盘，该机各部分工作协调，动作平稳，操作灵活可靠，并采用先进的电子计数控制，是国内目前唯一生产刺钢丝的设备。

Detailed Description

This machine is mainly suitable for various strands of barbed wire, the material should be conform to the requirements of the GE/T343-94 standard "general use hot dip galvanized low carbon steel wire, the product is widely used in defense, railway, highway, agriculture animal husbandry and other industries.

CS-A type barbed wire machine concludes of two parts, wire coiling and wire twisting, and matches with four wire de-coilers, the machine parts work coordination, movements smooth, flexible and reliable operation, and adopts advanced electronic counting control, is currently the only domestic production of barbed wire equipment.

技术参数 Technical Parameter

电动机：Y100L2-4，3 KW

主传动轴转速：402转/分

绕刺丝转速：470转/分

收线转速：134转/分

收线圆盘转速：30-255转/分

主机部分：1900×1300×980(mm)

收线加捻部分：1800×750×750(mm)

Motor: Y100L2-4, 3 KW

Main shaft speed: 402 Turn/min

Barbed wire speed: 470 Turn/min

Wire pulling speed: 134 Turn/min

Wire take-up rotational speed: 30-255 Turn/min

Main frame: 1900×1300×980(mm)

Wire take-up and twisting part: 1800×750×750(mm)

Project 项目	Parameter 基本参数
Barbed wire spacing 刺距	76, 102, 125mm
Braided wire diameter 股线直径	2.5-3mm
Barbed wire diameter 刺丝直径	2-2.5mm



CS-A

CS-B单股刺绳机 CS-B Barbed Wire Machine

描述

该机主要适用生产单股刺钢丝，其使用材料应符合GE/T343-94标准要求《一般用途热镀锌低碳钢丝》，如果股丝是中碳钢丝，但刺丝只能用低碳钢丝，适用大盘收丝。该产品广泛用于国防、铁路、高速公路、农畜牧等行业。

CS-B型单股刺钢丝由绕丝和收丝二部分连接组成，并配套三只放丝盘，该机动作平稳，噪音低，生产安全性高，能耗省，生产效率，并采用先进的电子计数控制，是国内目前唯一生产单股刺钢丝的企业。

Detailed Description

This machine is mainly suitable for various strands of barbed wire, the material should be conform to the requirements of the GE/T343-94 standard "general use hot dip galvanized low carbon steel wire, the product is widely used in defense, railway, highway, agriculture animal husbandry and other industries.

CS-B type barbed wire machine concludes of two parts, wire coiling and wire twisting (see figure 1, figure 2), and matches with four wire de-coilers, the machine parts work coordination, movements smooth, flexible and reliable operation, and adopts advanced electronic counting control, is currently the only domestic production of barbed wire equipment.

技术参数 Technical Parameter

电动机：Y100L2-4，2.2KW

主传动轴转速：357转/分

绕刺丝转速：119转/分

主机部分：1900×1300×980(mm)

收线加捻部分：1800×750×750(mm)

Motor type: Y100L2-4, 2.2 KW

Main shaft speed: 357 Turn/min

Barbed wire speed: 119 Turn/min

Main frame: 1900×1300×980(mm)

Wire take-up and twisting part: 1800×750×750(mm)

Project 项目	Parameter 基本参数
Barbed wire spacing 刺距	76, 102, 125mm
Braided wire diameter 股线直径	2.2-3.5mm
Barbed wire diameter 刺丝直径	1.8-2.2mm



CS-B



CS-C正反捻刺绳机 CS-C Reverse Twist Barbed Wire Machine

描述

该机主要适用于生产双股正反捻刺绳。其产品广泛使用于国防、铁路、高速公路、农畜牧等行业。使用材料为普通热镀锌低碳钢丝。CS-系列倒刺钢丝机是由卷筒钢丝和扭丝两部分组成的，该机具有节省材料和高容量的优点。

Detailed Description

GB/T343 requires the common hot dipped galvanized low carbon steel wire. The products can be used in the national defence, railroad, highway, stockbreeding and agriculture and so on. CS-series barbed wire machine is make up by spool wire and twist wire two parts.

Application: The machine can produce barbed wire which is extensively used in national defenses, military, railway, agriculture, animal husbandry and other industries.


Description: Suitable material is galvanized wire. The machine has advantages of material saving and high capacity.

技术参数 Technical Parameter

电机 : 2.2 KW
 主传动轴转速 : 357转/min
 产量 : 50 Kg/h
 捻数 : 4、6
 刺距 : 70 , 102
 股丝直径 : 1.6-2.6mm
 刺丝直径 : 1.6-2.3 mm
 主机部分 : 1900×1300×980(mm)
 收丝部分 : 1300×800×700(mm)
 设备重量 : 1200Kg

Motor : 2.2 KW
 Main shaft rotating speed: 357 turn/min
 Output: 50 Kg/h
 Twisting number: 4, 6
 Barb distance: 70mm, 102 mm
 Main wire diameter: 1.6-2.6mm
 Barbed wire diameter: 1.6-2.3 mm
 Main machine size: 1900×1300×980(mm)
 Re-coiler size: 1300×800×700(mm)
 Machine weight: 1200Kg

Project 项目	Parameter 基本参数
Barbed wire spacing 刺距	76, 102, 125mm
Braided wire diameter 股线直径	2.2-2.8mm
Barbed wire diameter 刺丝直径	1.8-2.2mm



CS-C

刀片刺绳机 Razor Barbed Wire Making Machine



13条刀片刺绳机
 Razor Barbed Wire Making Machine
 With 13 Sticks



5条刀片刺绳机
 Razor Barbed Wire Making Machine
 With 5 Sticks



设备的主要性能及特点

刀片刺绳是一种常用的安全防护性材料，其具有牢固锋利，便于施工，成本低廉等优点。刀片刺绳机是刀片刺绳生产的专用设备，具有操作简单方便，安全可靠，生产效率高，适应品种多等优点。

产品的用途和材料要求

刀片刺绳机（线体）生产的刀片刺绳主要用于各种特殊场所及临时障碍设置的防护性材料。其材料选用0.3-0.6mm厚的镀锌板，以及镀锌铁丝，直径为φ1.5~3.5 mm。

设备的组成

刀片冲剪设备用于生产刀片刺绳复合时所需要的刺片。刀片冲剪设备包括送料用的开料机、压力机、刀片分离及收料用的收卷机。其中冲剪设备包括压力机、伺服送料机构及模具。

Main performances and characteristics

Razor barbed wire is common safe operation material, it has advantages that strong sharp, easy to construct, low cost and so on. Razor barbed wire machine is a special equipment to manufacture razor barbed wire, it has advantages that operate simply, safety, efficient production, adapt to many sorts and so on.


Material requirements and barbed wire application

Finished products of razor barbed wire machine (production line) are used for all kinds of special places and temporary barriers of protective materials. Its' material are galvanized plate that 0.3-0.6mm in thick and diameter from 1.5-3.5mm galvanized iron wire.

Composition of the equipment

Blade punching machine is used for producing composite blade thorn rope when needed for the thorn. Blade punching machine including pay-off, punching machine, blade separation machine and re-coiler. Punching and shearing equipment is composed of press machine, servo feeding and mold.

刀片刺绳机辅助设备 Accessory Machine

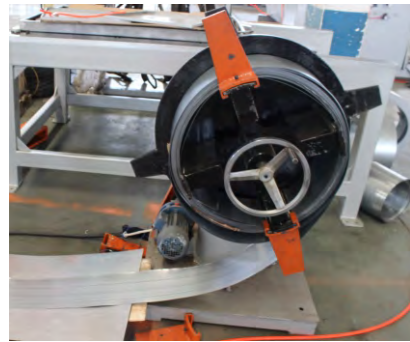

开料架 / Pay-off

名称/ Item	参数 / Specification
内径 Inner diameter	500mm 可调(Adjustable)
外径 Outer diameter	1000mm
承重 Loading weight	500Kg
电机功率 Motor power	25W, 电压 / Voltage : 380V, 转速 / Rotation speed : 1400r/min
设备尺寸 Size	700×700×1230mm



成型主机/ Punching machine

名称/ Item	参数 / Specification	
	5条 / 5 strips	13条 / 13 strips
公称力 Normal force	250KN	600KN
滑块行程 Slide block stroke	8mm	14mm
滑块行程次数 Times of sliding block stroke	220次/分	250次/分
最大装模高度 Max Die Set Height	160mm	200mm
装模高度调节量 Die Height Adjustment	40mm 可调(Adjustable)	170-200mm(Adjustable)
工作台尺寸 Size of working table	760mmx500mm	634mmx470mm
电机功率 Motor power	25W, 电压 / Voltage : 380V, 转速 / Rotation speed : 1450r/min	7.5W, 电压 / Voltage : 380V, 转速 / Rotation speed : 960r/min
设备尺寸 Size	1300x800x1650mm	1150x1100x1860mm
重量 Loading weight	1100Kg	1920Kg



收卷机 / Recoiler

名称/ Item	参数 / Specification	
	5条 / 5 strips	13条 / 13 strips
内径 Inner diameter	100mm	
外径 Outer diameter	500m	
承重 Loading weight	500Kg	
电机功率 Motor power	0.75W, 电压 / Voltage : 380V, 转速 / Rotation speed : 1400r/min	
设备尺寸 Size	700×980×970mm	1510×1200×1820mm
重量 Weight	500KG	458KG



刀片刺绳成型机 / Barbed Wire Clamping Machine

Blade thickness: 0.3~0.6mm
 Wire diameter: φ1.5~φ3.5mm
 Speed: 15~20m/Min, adjustable
 Servo motor: power:2KW, rotate speed: 2000r/min, speed ratio: i12
 ID: 450mm, adjustable
 OD: 450~950mm
 Loading weight: 500Kg
 Cut method: Auto cut
 Servo motor: power:0.75KW, rotate speed:3000r/min, speed ratio: i20
 Machine size: 2180×1390×1375mm
 Weight: 662.1Kg

适用板厚: 0.3~0.6mm
 适用线径: φ1.5~φ3.5mm
 复合速度: 15~20m/Min可调
 电机: 功率:2KW, 电压: 380V, 转速: 2000r/min (速比i12)
 内径: 450mm可调
 外径: 450~950mm
 承重: 500Kg
 切断方式: 自动切断
 电机(伺服): 功率:0.75KW, 电压: 380V, 转速: 3000r/min (速比i20)
 设备尺寸: 2180×1390×1375mm
 重量: 662.1Kg

我们的展会 Our exhibition


2016 德国杜塞尔多夫线材管材展
 2016 Germany Dusseldorf Wire & Tube exhibition



2018 德国展会
 2018 German exhibition



2015美国拉斯维加斯建材展 / 2015 Las Vegas building materials exhibition

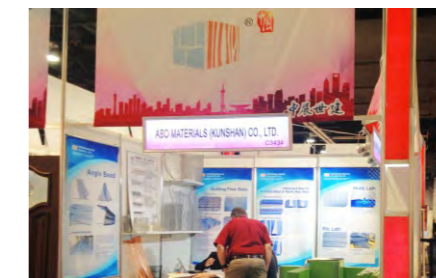

2017迪拜展会
 2017 Dubai Big5 exhibition



2016迪拜展会
 2016 Dubai Big5 exhibition



2015迪拜展会
 2015 Dubai Big5 exhibition



委内瑞拉展会
 Venezuela exhibition



广交会 / Canton fair

